
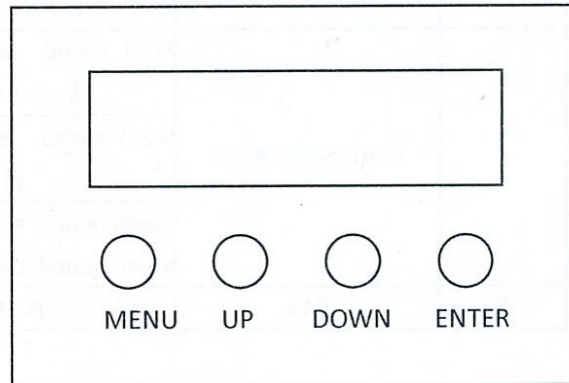


LED King Kong Strobe White Light 8P

User's Manual

Thank you very much for purchasing LED King Kong strobe white light 8P. For your personal safety and better use of this product, please read this manual carefully before use and follow the instructions to avoid personal injury and damage the lamp.

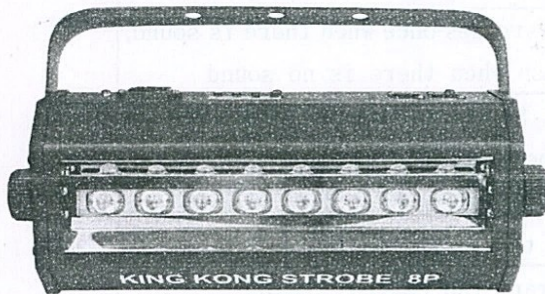

● Packing List:

Please check if you have the following items when you open the light box:

| | | |
|---------------------------------|-------|-----|
| KING KONG strobe white light 8P | | one |
| Power cord | | one |
| Manual | | one |
| Handle | | one |
| Knob, gasket | | Two |

● Technical Parameters:

Power supply: AC90~240V , 50Hz/60Hz

Rated power: 200W

Light source: 8 PCS 25W LED

Chassis material: metal

Luminous color: white light

Power connection: power cord

Signal connection: signal input line / output line

Control channel: 5/9 DMX-512 signal channels

Control mode: DMX-512 signal control, RDM, sound, auto and master-slave mode , strobe, horse racing, exposure

Cooling system: fan forced cooling system

Working environment: indoor

Packing method: air box or carton

Inner box size: 39*21.5*16.5CM

Carton size: 46*41*36CM

N. W: 2.0KG

G. W: 2.4KG

Carton weight: 11.0KG (4pcs/carton)

● Instructions for use:

After opening the box, carefully check whether the lamp is damaged by transportation, such as whether the screw is loose, whether the lens is broken or not. Please check before powering up. Check that the lamp is placed correctly and securely, and check that the power supply voltage is the same as the product. This equipment is a Class 1 protection device, so the ground wire of the power supply must be grounded and completed by a professional. Check that the power supply voltage is normal before use.

● Display Function:

King Kong adopts display mode operation and DMX mode operation, the specific settings are as follow:

| Display mode | | Function Instruction |
|--------------|------------------|---|
| 1 | A001 (A001-A512) | Address code selection |
| 2 | Chnd | 5CH/9CH channel mode selection |
| 3 | Au01-Au12 | 12 built-in program effects are selected, and the 12th effect is a collection of the first 11 program effects. In this mode, press "Enter" to enter the speed adjustment interface, 001-255. The larger the value, the faster the effect changes. |
| 4 | Sou1/Sou2/Sou3 | Sou1 sound mode 1, strobes once when there is sound, does not flash when there is no sound |
| | | Sou2 sound mode 2, Strobe when there is sound, not flash when there is no sound |
| | | Sou3 sound mode 3, Cycle through all built-in effects when sounding, and turn off when there is no sound |
| 5 | FAN | ON/OFF Smart fan control on/off |

● DMX Channel Function:

This strobe light has **RDM function**, adopts standard **DMX-512 signal**, there are 5/9 control channel, the specific control contents are as follow:

| Channel | 5CH Channel mode | 9CH Channel mode |
|---------|--|---|
| CH1 | 0-255 total dimming, from dark to bright | 0-255 total dimming, from dark to bright |
| CH2 | 0-255 strobe, from slow to fast | 0-255 strobe, from slow to fast |
| CH3 | 128-255 exposure for 3 seconds | 128-255 exposure for 3 seconds |
| CH4 | 0-255 macro function | 0-255 macro function |
| CH5 | 0-255 Demo effect speed adjustment (in combination with CH4) | Demo effect speed adjustment (in combination with CH4) |
| CH6 | | 0-255 The 1st set of lamp bead brightness adjustment, from dark to bright |
| CH7 | | 0-255 The 2nd set of lamp bead brightness adjustment, from dark to bright |
| CH8 | | 0-255 The 3rd set of lamp bead brightness adjustment, from dark to bright |
| CH9 | | 0-255 The 4th set of lamp bead brightness adjustment, from dark to bright |

● Maintenance:

1. Try to prevent the dust, dirt and smoke oil from laying down and even flowing into the lamp body. Use the environment to keep the product clean as much as possible;
2. Please use professional glass cleaning agent regularly every month and clean the PVC board with flannel to ensure maximum brightness output and extend the service life of the light source.